


LVTLS MODULE

3.3 V to 5 V bidirectional Level Shifter, 32-bit Transceiver

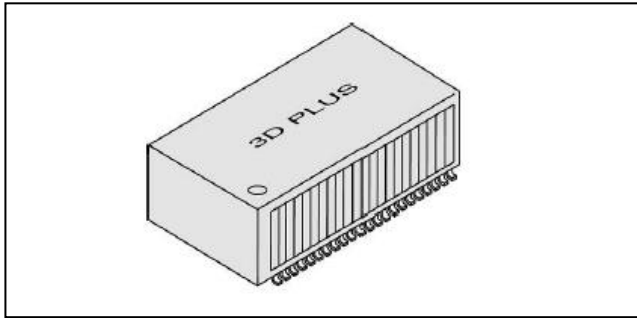

Features


- Extended voltage range from 2.3 V to 5.5 V
- Dual supply bidirectional level shifter
- Separated enable pin for 3-state output
- Schmidt-triggered I/Os: 100 mV hysteresis
- Internal 26 Ω limiting resistor on each I/O
- High speed: $T_{pd} = 8$ ns
- Fail safe function
- Cold spare function
- Radiation Hardened Die:
 - Total Dose: 100 Krad(Si)
 - Immune to SEL (LET>80MeV.cm²/mg)
- Available Temperature Range:
 - 0°C to 70°C
 - 40°C to +85°C
 - 55°C to +125°C

General Description

The 3DLT164245VS1645 is a rad-hard advanced high-speed CMOS, Schmitt trigger 32-bit (Dual 16-bit) bidirectional multi-purpose transceiver with 3-state outputs and cold sparing. Designed for use as an interface between a 5 V bus and a 3.3 V bus in mixed 5 V/3.3 V supply systems, it achieves high-speed operation while maintaining the CMOS low-power dissipation. All pins have cold spare buffers to change them to high impedance when Vcc is tied to ground. This module is intended for two-way asynchronous communication between the data buses. The direction of the data transmission is determined by the DIR input. The A port interfaces with the 3.3 V bus but can also operate at 2.3 V. The B port operates with the 5 V bus. The 3DLT164245VS1645 is packaged in an 82 pin SOP.


Pin Assignment (Top View)

SOP 82 (Pitch: 0.5 mm)



1	#EN1	22	DIR2	43	4A7	64	2A7
2	1B0	23	3B0	44	4A6	65	2A6
3	1B1	24	3B1	45	GND	66	2A5
4	GND	25	3B2	46	4A5	67	2A4
5	1B2	26	3B3	47	4A4	68	GND
6	1B3	27	GND	48	4A3	69	2A3
7	1B4	28	3B4	49	4A2	70	2A2
8	1B5	29	3B5	50	Vcc2	71	2A1
9	Vcc1	30	3B6	51	4A1	72	2A0
10	1B6	31	3B7	52	4A0	73	1A7
11	1B7	32	4B0	53	3A7	74	1A6
12	2B0	33	4B1	54	3A6	75	Vcc2
13	2B1	34	Vcc1	55	3A5	76	1A5
14	2B2	35	4B2	56	3A4	77	1A4
15	2B3	36	4B3	57	GND	78	1A3
16	GND	37	4B4	58	3A3	79	1A2
17	2B4	38	4B5	59	3A2	80	GND
18	2B5	39	GND	60	3A1	81	1A1
19	2B6	40	4B6	61	3A0	82	1A0
20	2B7	41	4B7	62	Vcc2		
21	Vcc1	42	#EN2	63	DIR1		

Functional Block Diagram

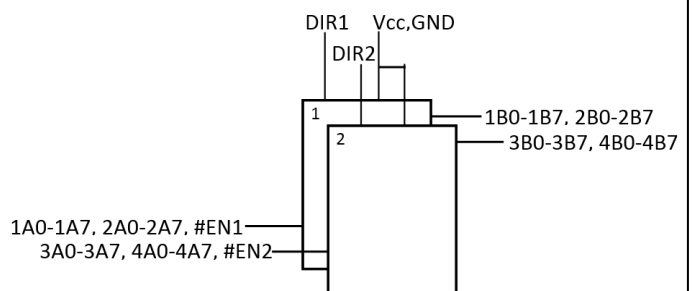


LVTLS MODULE

3DLT164245VS1645

3.3 V to 5 V bidirectional Level Shifter, 32-bit Transceiver

Mechanical Drawing

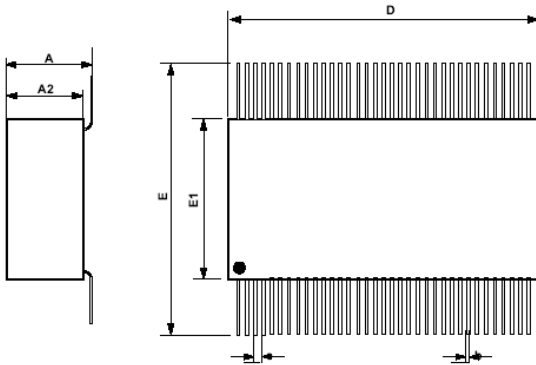

	Min	Max
A	4.3	5
A2	3.2	3.6
D	21.70	22.10
E1	10.90	11.10
b	0.20	
e	0.50	
E	16.1 Max.	
Dimension (mm)		
Max. weight: 2.4g		

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Min	Typ	Max	Unit
Supply Voltage	V_{cc1}	4.5		5.5	V
Supply Voltage	V_{cc2}	2.3		3.6	V
Input Voltage	V_i	0		V_{cc1}	V
Output Voltage	V_o	0		V_{cc1}	V
Input rise and fall time	dt/dv	0		8	ns/V

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Supply Voltage	V_{cc}	-0.3 to 6	V
Storage temperature	T_{STG}	-65 to +150	°C
Input current	I_I	+10	mA

DC Characteristics

Parameter	Symbol	Min	Max
Schmitt trigger positive going threshold port A	V_{T+A}		$0.7V_{cc2}$
Schmitt trigger positive going threshold port B	V_{T+B}		$0.7V_{cc1}$
Schmitt trigger positive going threshold port A	V_{T-A}		$0.3V_{cc2}$
Schmitt trigger positive going threshold port B	V_{T-B}		$0.3V_{cc1}$

Note :

Permanent device damage may occur if "ABSOLUTE MAXIMUM RATINGS" are exceeded.
Functional operation should be restricted to recommended operating condition.
Exposure to higher than recommended voltage for extended periods of time could affect device reliability

3DLT164245VS1645 - X X

Temperature Range

C = 0°C ~ +70°C

I = -40°C ~ +85°C

M = -55°C ~ +125°C


Quality Level

N = Commercial Grade

B = Industrial Grade

S = Space Grade

Module Marking

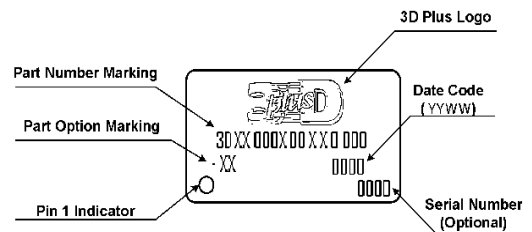

Main Sales Office

	3D PLUS				
FRANCE	408, rue Hélène Boucher ZI. 78532 BUC Cedex	Tel : 33 (0)1 30 83 26 50	Fax : 33 (0)1 39 56 25 89	Web : www.3d-plus.com e-mail : sales@3d-plus.com	DISTRIBUTOR
USA	3D PLUS USA, Inc 6633 Eldorado Parkway Suite 420 Mckinney, TX 75070	Tel : (241) 733-8505	Tel : (241) 733-8506	e-mail : sales@3d-plus.com	